


**VERTICAL MOUNTING
STANDARD SKIRT
ON FMV-60 & FMV-80**

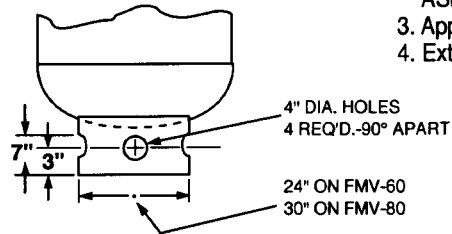

- Note:**
1. Built for 200 P.S.I. working pressure.
 2. Constructed in accordance with section VIII, Div.1 of the ASME boiler & pressure vessel code, stamped.
 3. Approved automotive supplier.
 4. Exterior shop primed.

* Dimensions A through AA are in inches.

Part No.	Cap. Cu. Ft.	Cap. Gal.	Wt. (lbs.)	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V	W	Y	Z	AA
FMV-18	1	8	30	12	19	12	3	6	1	1	-	1/4	-	1/2	-	-	1/2	3	1/2	3	6	8 1/2	6	3	4	2
FMV-38	2	17	50	12	37	30	7 1/2	20	1	1	-	1/4	-	1/2	-	-	1/2	3	1 1/2	3	6	8 1/2	6	3	4	2
FMV-50	3	22	68	14	33	25	5	15	1 1/2	1 1/2	-	1/2	-	1/2	-	1 1/2	1/2	3	2	3 1/2	7	9 1/2	6	3	4	2
FMV-75	4	33	95	16	38	29	19	18	1 1/2	1 1/2	-	1/2	-	1/2	-	1 1/2	1/2	3	2	3 1/2	7	9 1/2	6	3	4	2
FMV-10	6	46	140	18	46	36	9	18	1 1/2	1 1/2	-	1/2	-	1/2	-	2	1/2	3	2	6	12	14	12	6	10	2
FMV-20	11	87	230	24	49	36	9	18	1 1/2	1 1/2	-	1/2	-	1/2	-	2	1/2	4	2	6	12	14	12	6	10	2
FMV-25	14	109	295	24	62	48	8 1/2	20	1 1/2	1 1/2	-	1/2	-	1/2	-	2	1/2	4	2	6	12	14	12	6	10	2
FMV-35	20	153	430	30	54	36	8	33	2	2	-	1	-	1/2	-	2	1	4	2	9	18	20	18	9	16	2
FMV-60	35	260	700	30	90	72	8	35	2	2	-	1	-	1/2	-	2	3/4	-	2	-	-	-	-	-	-	-
FMV-80	46	330	1000	36	84	60	16 1/2	30	-	2	-	-	-	3/4	-	2	3/4	-	2	-	-	-	-	-	-	-