



SUBMITTAL

TYPE: ASME GLASSLINED STORAGE TANKS

MODELS: GA 200M TO GA 1500M

Submittal Sheet No. G-3010

Date 9-06

JOB _____

AA tanks Representative _____

Unit Tag No. _____

Order No. _____ Date _____

Engineer _____

Submitted By _____ Date _____

Contractor _____


Approved By _____ Date _____

DESCRIPTION


AA tanks ASME Glass lined storage tanks are preferred for storage of hot or cold potable water. AA tanks lining provides a durable interior surface to with stand the wearing effects of high volume and high temperature water. Designed for use in temperatures up to 180°F

FEATURES

- Glass Lined Interior (5 yr. warranty)
- Magnesium Anode Rods
- Vertical or Horizontal Installation
- Threaded Leg Sockets on all Models
- Prime Painted Exterior
- Skidded for Shipment

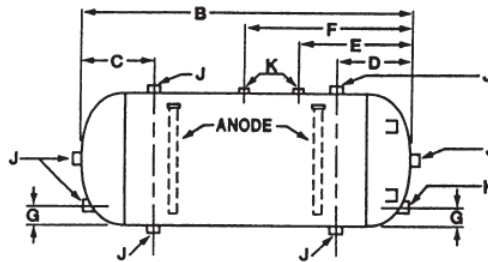

H BLIND CPLG. 4 @ 90° FOR PIPE LEGS ON VERT. MOUNTING



ASME CONSTRUCTION

MODEL NUMBER	GAL. CAP.	PSI W.P.	DIMENSIONS (in inches)											SHIPPING WEIGHT
			A	B	C	D	E	F	G	H	J	K	L	
GA 200M	200	125	30	72	13	13	19 1/2	28 1/2	4	2 1/2	2 1/2	3/4	11	421
GA 350M	350	125	36	87	14 1/2	14 1/2	21	30	4	2 1/2	2 1/2	3/4	13 3/8	618
GA 400M	400	125	36	92	14 1/2	14 1/2	21	30	4	2 1/2	2 1/2	3/4	13 3/8	658
GA 500M	500	125	42	88	18	18	24	52	4	3	3	3/4	15 1/4	865
GA 750M	750	125	48	105	19 3/4	19 3/4	-	26 3/4	4	3	3	3/4	16	1287
GA 1000M	1000	125	48	138	19 3/4	19 3/4	-	26 3/4	4	3	3	3/4	20	1655
GA 1250M	1250	125	54	129	19 3/4	19 3/4	-	26 3/4	4	4	3	3/4	20	2451
GA 1500M	1500	125	54	153	19 3/4	19 3/4	-	26 3/4	4	4	3	3/4	20	2810

TYPICAL SPECIFICATIONS

Furnish and install on the plans and described herein, a Glass Lined Storage Tank Model _____, or approved equal. All models shall have a working pressure of 125 PSI and fabricated to the latest revision of the ASME Boiler and Pressure Vessel Code. The interior shall be properly prepared and sand blasted to white metal prior and shall be glass lined with an epitaxial glass crystal combining alkaline borosilicate and cobalt ferrite which has been fused to the steel base by firing at 1600 degrees Fahrenheit. The exterior shall be primed painted. Glass coating shall be continuous over the entire inner surface of the tank. Magnesium anode rods shall be provided.