

AA tanks

SUBMITTAL

NTA-SERIES

HYDRONIC EXPANSION TANKS

Models: NTA-15 thru NTA-280

Submittal Sheet No. NTA-2016A

Date: 12/20

Job Name _____	Submitted By _____	Date _____
Location _____	Approved By _____	Date _____
_____	Order No. _____	Date _____
Engineer _____	Notes _____	
Contractor _____		
Sales Rep. _____		

Description

AA tanks NTA series are ASME fixed diaphragm type pre-charged expansion tanks. They are designed to absorb the expansion forces and control the pressure in heating/cooling systems. The system's expanded water (fully compatible with water/glycol mixtures) is contained in heavy-duty diaphragm that prevents tank corrosion and waterlogging problems. All NTA expansion tanks can be installed vertically or horizontally.

Construction

Shell: Carbon Steel

(Available in 304 / 316 Stainless Steel)

Diaphragm: Heavy Duty Butyl

(NSF Listed / FDA Approved Materials)

System Connection: Carbon Steel

Performance Limitations

Maximum Design Temperature: 240°F

Maximum Design Pressure: 125 PSIG*

NTA 15 thru NTA 60: 150 PSIG*

NTA 80 thru NTA 280: 125 PSIG*

*200 & 250 PSIG available



Listed Materials


Model Number	Part Number	Tank Volume (Gallons)	Acceptance Volume (Gallons)	Tagging Information	Quantity
NTA-15	29010015	7.8	6.3		
NTA-20	29010020	11	8.8		
NTA-40	29010040	25	20.2		
NTA-60	29010060	35	28		
NTA-80	29010080	45	36		
NTA-100	29010100	60	48.5		
NTA-120	29010120	70	56.5		
NTA-144	29010144	80	65		
NTA-180	29010180	90	73		
NTA-200	29010200	115	93		
NTA-240	29010240	140	113.5		
NTA-260	29010260	158	128		
NTA-280	29010280	211	171		

Typical Specification

Furnish and install, as shown on plans, a _____ gallon _____" diameter X _____" (high) pre-charged expansion tank with a fixed heavy-duty butyl diaphragm. The tank shall be equipped with a NPT system connection, and a 0.302"-32 charging valve connection (standard tire valve) to facilitate the on-site charging of the tank to meet system requirements. The tank must be constructed in accordance with most recent addendum of Section VIII Division 1 of the ASME Boiler and Pressure Vessel Code.

Each tank shall be AA tanks model number NTA-_____ or approved equal.

25110 THOMAS DR • WARREN, MI 48091 • (586) 427-7700 • (586) 427-7895 FAX • www.aatanks.com

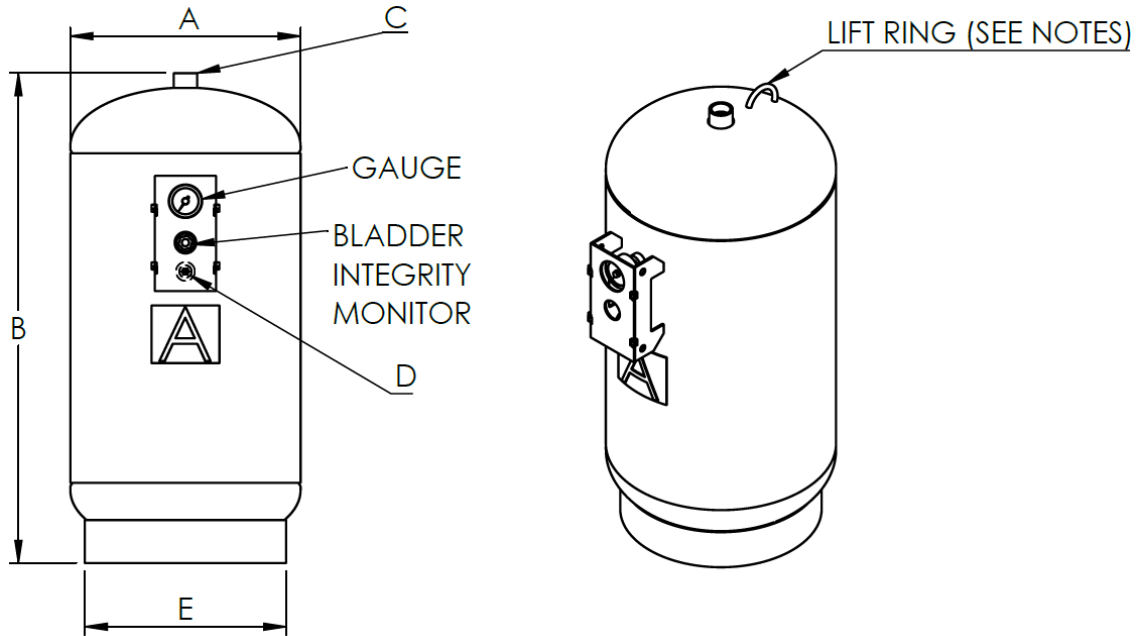

NTA 15 THRU NTA 280

Dimensions & Weights

Model Number	Dimensions in Inches					Approx. Ship Weight (lbs)
	A	B	System Connection	Charging Valve	E	
			C	D		
NTA-15	12	19	3/4	0.302" -32NC	10	42
NTA-20		25				52
NTA-40	16	33	1		14	84
NTA-60		44				97
NTA-80	20	38	1 1/2		18	148
NTA-100		49				175
NTA-120	24	46	1 1/2		22	259
NTA-144		49				268
NTA-180		52				283
NTA-200		66				325
NTA-240		78		362		
NTA-260	30	63	1 1/2	24	591	
NTA-280		81			752	

Notes

- Tanks are factory pre-charged at 12 psi and field adjustable.
- California code-sight glass is available upon request.
- Available with mounting clips.
- Lift ring on models NTA-40 thru NTA-280.